
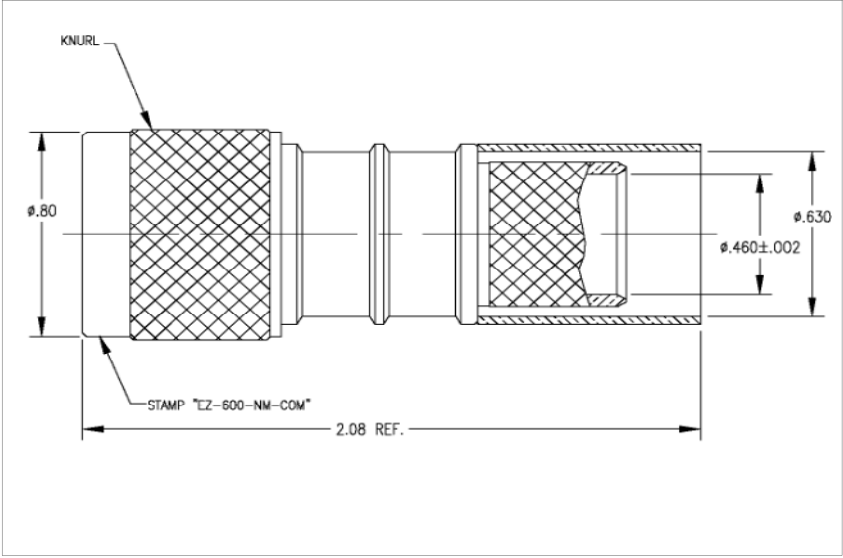
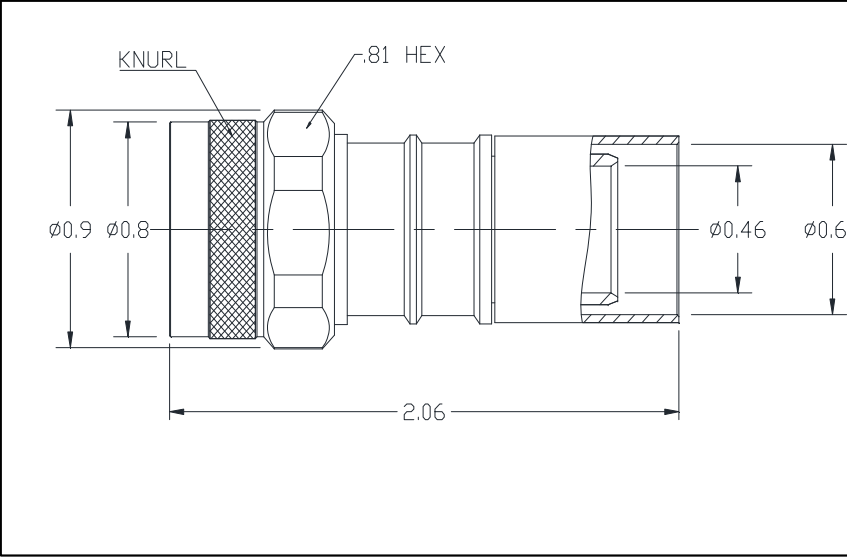
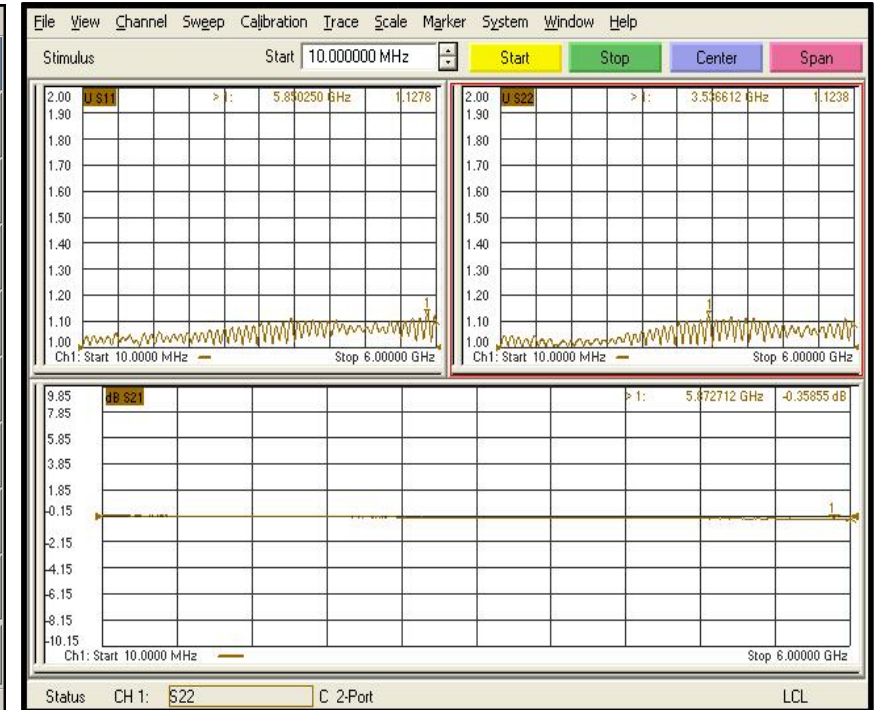


# Connector Comparison Sheet

	Old Connector 3190-2171 EZ-600-NM-COM	New Connector 3190-2627 EZ-600-NMH-X																														
<b>1. Materials&amp;Plating</b>	<table border="1"> <thead> <tr> <th>Material</th> <th>Plating</th> <th>Thickness</th> </tr> </thead> <tbody> <tr> <td>1) Body</td> <td>Nickel</td> <td></td> </tr> <tr> <td>2) Center Contact</td> <td>Silver</td> <td></td> </tr> <tr> <td>3) Coupling nut</td> <td>Nickel</td> <td></td> </tr> <tr> <td>4) Ferrule</td> <td>Nickel</td> <td></td> </tr> </tbody> </table>	Material	Plating	Thickness	1) Body	Nickel		2) Center Contact	Silver		3) Coupling nut	Nickel		4) Ferrule	Nickel		<table border="1"> <thead> <tr> <th>Material</th> <th>Plating</th> <th>Thickness</th> </tr> </thead> <tbody> <tr> <td>Brass</td> <td>Albaloy</td> <td>&gt;79μ"(2μm)</td> </tr> <tr> <td>Brass</td> <td>Gold</td> <td>&gt;50μ"(1.27μm)</td> </tr> <tr> <td>Brass</td> <td>Albaloy</td> <td>&gt;79μ"(2μm)</td> </tr> <tr> <td>Copper</td> <td>Albaloy</td> <td>&gt;79μ"(2μm)</td> </tr> </tbody> </table>	Material	Plating	Thickness	Brass	Albaloy	>79μ"(2μm)	Brass	Gold	>50μ"(1.27μm)	Brass	Albaloy	>79μ"(2μm)	Copper	Albaloy	>79μ"(2μm)
Material	Plating	Thickness																														
1) Body	Nickel																															
2) Center Contact	Silver																															
3) Coupling nut	Nickel																															
4) Ferrule	Nickel																															
Material	Plating	Thickness																														
Brass	Albaloy	>79μ"(2μm)																														
Brass	Gold	>50μ"(1.27μm)																														
Brass	Albaloy	>79μ"(2μm)																														
Copper	Albaloy	>79μ"(2μm)																														
<b>2. Dimension&amp;Outline</b>																																
<b>3. Installation</b>	Need Braid Trim	No Braid Trim																														

## 4. Test Curve

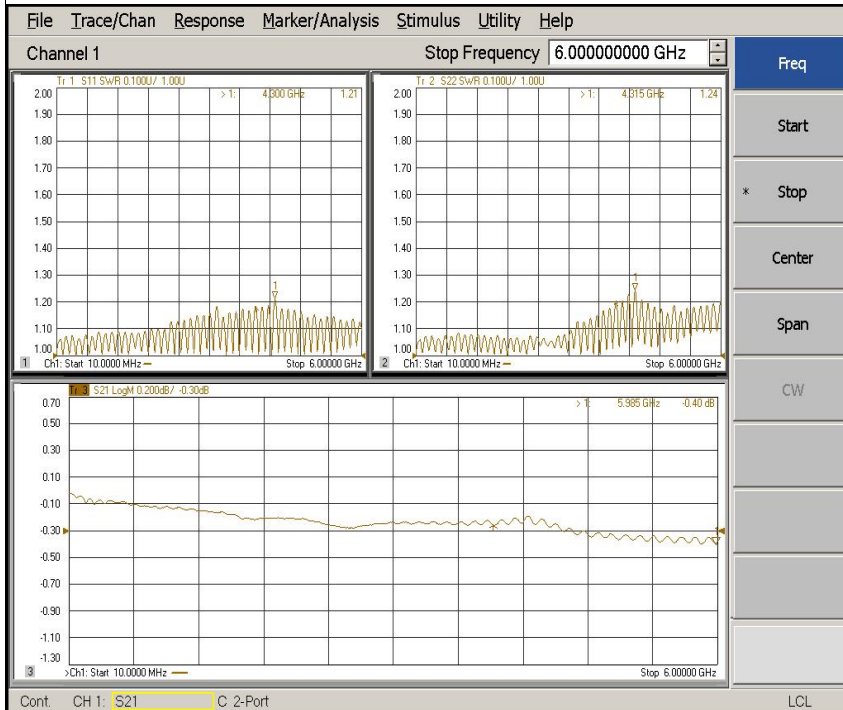

\* The test curve is based on the assembly 1m cable with 2 connectors on each end.