



**TIMES** MICROWAVE SYSTEMS


## TC-240-NMC (stock code: 3190-244)

### Type N-Male Plug

solder-on center contact  
clamp-on outer contact

#### INSTALLATION INSTRUCTIONS

(Cable Types: LMR-240; 240 DB-240 FR; 240 MA; 240 ULTRAFLEX)



WEATHER  
SEAL



CLAMP  
NUT



WASHER  
(WHEN SUPPLIED)



GASKET




BRAID  
CLAMP




CONTACT




CONNECTOR  
BODY

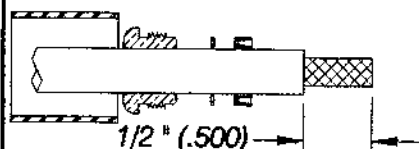


STEP 1

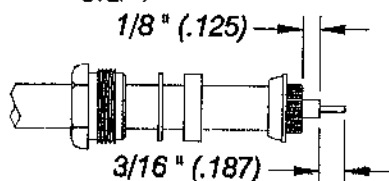

STEP 2

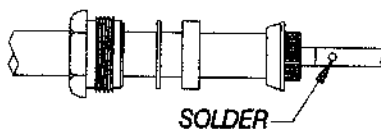

STEP 3

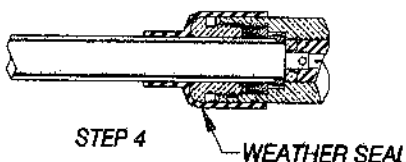

STEP 4

WEATHER SEAL

1. (A) Slide weather seal, clamp nut, washer and gasket onto cable. Cut jacket to dimensions shown. Be sure v-groove faces away from nut as shown.
2. (A) Slide braid clamp over braid. Being certain that clamp seats squarely against cut end of jacket.  
(B) Form braid wires smoothly over clamp as shown and trim off excess wire even with shoulder.  
(C) Cut conductor and dielectric to dimensions shown.  
(D) Remove any residual plastic from center conductor.  
(E) Deburr center conductor using a fine file.
3. (A) Seat center contact firmly against cable dielectric and soft solder to cable conductor. Use minimal heat to minimize melting of foam dielectric. Remove any excess solder from contact surface.
4. (A) Insert assembly into connector body being certain braid clamp is seated. Tighten clamp nut to 20-25 lbs.-ins. torque.  
(B) Heat shrink weather seal over rear of connector body and down over cable jacket using a hot air gun.