


THE REVISION STATUS OF ALL SHEETS OF THIS DRAWING IS THE SAME AS SHEET 1

LTR	DESCRIPTION	DATE	BY
-	Released	9/1/94	JP

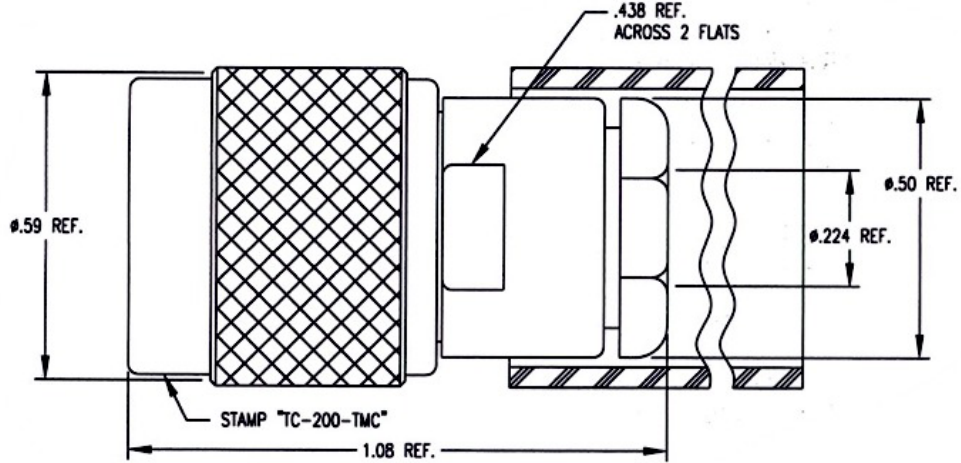

I. MATERIALS & FINISHES

- center contact: Gold (30u")Plated Brass
- outer contact: Silver (200 u")Plated Brass
- coupling nut: Silver (200 u")Plated Brass
- body: Silver (200 u")Plated Brass
- dielectric: Teflon® PTFE
- gasket: Silicone Rubber
- shrink sleeve: Adhesive Lined Polyolefin
- attachment: braid clamp

II. ELECTRICAL PROPERTIES

- impedance: 50 ohms
- working voltage: 500 vrms (max)
- vswr: 1.25:1 (max) up to 3 GHz
- insertion loss: 0.10 x √Fghz

Unless otherwise specified, dimensions are in inches. Tolerances are applicable when specified.

These drawings and specifications contain proprietary information which is the property of Times Microwave Systems.

Approvals		
Drawn	JP	9/1/94



TIMES MICROWAVE SYSTEMS
 Wallingford, CT 06492
 (203) 949-8400; (203) 949-8423.Fax
 www.timesmicrowave.com

TC-200-TMC
 Type-TNC male (plug) – Solder Pin
 for LMR-200 Cable

Size A	CAGE CODE 68999	Drawing No.: 3190-240
Scale: NA	Rev. (-)	Sheet: 1 of 1