

I. MATERIALS & FINISHES

Components	Materials	Finishes	Thk. (μ")
Body	Brass	Albaloy	80
Center Cont.	Beryllium Copper	Gold	50
Ferrule	Copper	Albaloy	80
Insulator	PTFE	-	-

II. ELECTRICAL PROPERTIES

Impedance (Ω):	50
Frequency Range (GHz):	DC to 8 GHz
Dielectric Withstanding Voltage (V):	1000
Insulation Resistance (MΩ):	≥5000
VSWR:	≤1.30
Insertion Loss(dB, f/GHz):	-0.1x √f

III. ENVIRONMENT PROPERTIES


Temperature Range:	-40°C~+125°C
Thermal Shock:	MIL-STD 202G, Meth.107, Cond.B
Vibration:	MIL-STD 202G, Meth.204, Cond.B
Shock:	MIL-STD 202G, Meth.213, Cond I
Climatic Class:	IEC 60068 40/125/21
(2002/95/EC)RoHS:	Compliant

IV. MECHANICAL PROPERTIES

Center Cont.:	Finger Contact
Outer Cont.:	Crimp
Coupling Nut Torque (N.m):	N/A
Cbl-Connector Retention Force (N):	100
Durability (cycles):	100

V. TOOLING

Stripping Tool: 3192-102/CST-195/200
 Crimping Tool: 3190-667/CT-240/200/100

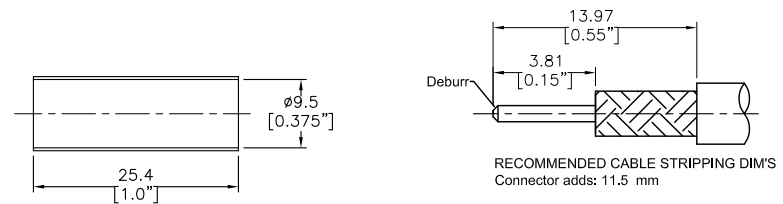

Shrink Tube (3/8"x1.0" 3:1)

According to Standard: QLF

MATERIAL:	UNLESS OTHERWISE SPECIFIED	DFTM: Joslen	
	ALL DIMENSIONS ARE IN mm MACHINED SURFACES FINISH 1.6 RMS MAX. REMOVE ALL BURRS 0.15X45° MAX. BREAK MACHINE CORNERS 0.15X45° D MAX. FILLET R. TOLERANCES ON DECIMALS .X ±0.3 .XX ±0.15 ANGLES ±2° FRACTIONS ±N/A	DATE: 2017.06.06	
USED ON: O		CHKD: KG	EZ-195-QF-X QMA Female (Jack) Straight Non-Solder Pin No Braid Trim Connector for LMR-195 Cable
SCALE: N/A DWG SIZE: A4		DATE: 2017.06.06	
DO NOT SCALE DRAWING		APPD: TZ	
CODE IDENT: 68999	DATE: 2017.06.06	SHEET: 1 OF 1	3190-6384
			REV: A