


THE REVISION STATUS OF ALL SHEETS OF THIS DRAWING IS THE SAME AS SHEET 1

LTR	DESCRIPTION	DATE	BY
-	Released	2/21/01	JCL

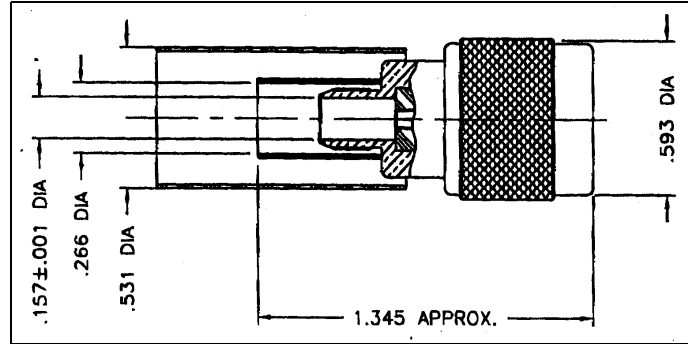

I. MATERIALS & FINISHES

- center contact: GoldPlated Beryllium Copper (spring fit ; non-solder)
- outer contact: Nickel Plated Brass
- coupling nut: Nickel Plated Brass
- body: NickelPlated Brass
- crimp sleeve: Nickel Plated Copper
- dielectric: Teflon® PTFE
- gasket: Silicone Rubber
- shrink sleeve: Adhesive Lined Polyolefin
- crimp size: .255" hex

II. ELECTRICAL PROPERTIES

- impedance: 50 ohms
- working voltage: 500 vrms (max)
- vswr: 1.25:1 (max) up to 6 GHz
- insertion loss: 0.1 x √Fghz

Unless otherwise specified, dimensions are in inches. Tolerances are applicable when specified.

These drawings and specifications contain proprietary information which is the property of Times Microwave Systems.

Approvals		
Drawn	JCL	2/21/01

TIMES MICROWAVE SYSTEMS
 Wallingford, CT 06492
 (203) 949-8400; (203) 949-8423.Fax
 www.timesmicrowave.com

EZ-240-TM
TNC male Straight Plug
for LMR-240 Cable

Size A	CAGE CODE 68999	Drawing No.: 3190-1128
Scale: NA	Rev. (-)	Sheet: 1 of 1