

TF-047

Micro-Coaxial Cable

TF-047 is a versatile micro-coaxial cable ideal for high-density applications. Available in bulk or cable assembly with a wide selection of interfaces, TF-047 offers high performance and reliability in a compact footprint.

Features

- Optimal SWAP-C cable solution
- Compatible with a large selection of connectors
- Flexible and compact for easy routing

Specifications

Ω Impedance
50 Ohms

Op Temp
-85 to +302°F
-65 to +150°C

Units

Maximum Outer Diameter	in (mm)	0.059 (1.50)
Maximum Weight/1000 Feet	lb (kg)	3.77 (1.71)
Static Bend Radius	in (mm)	0.20 (5.08)
Dynamic Bend Radius	in (mm)	0.40 (10.16)
Velocity of Propagation	%	70
Max. Frequency	GHz	50
Capacitance	pF/ft (pF/m)	28.83 (94.59)

Calculation

$$IL = (K1 \times \sqrt{f} + K2 \times f) \times \text{Cable Length}$$

Cable Insertion Loss
f = Frequency (MHz)


Use K values with
matching length unit

K values

dB/ft

dB/m

K1	.012253	.040202
K2	.000018	.000060

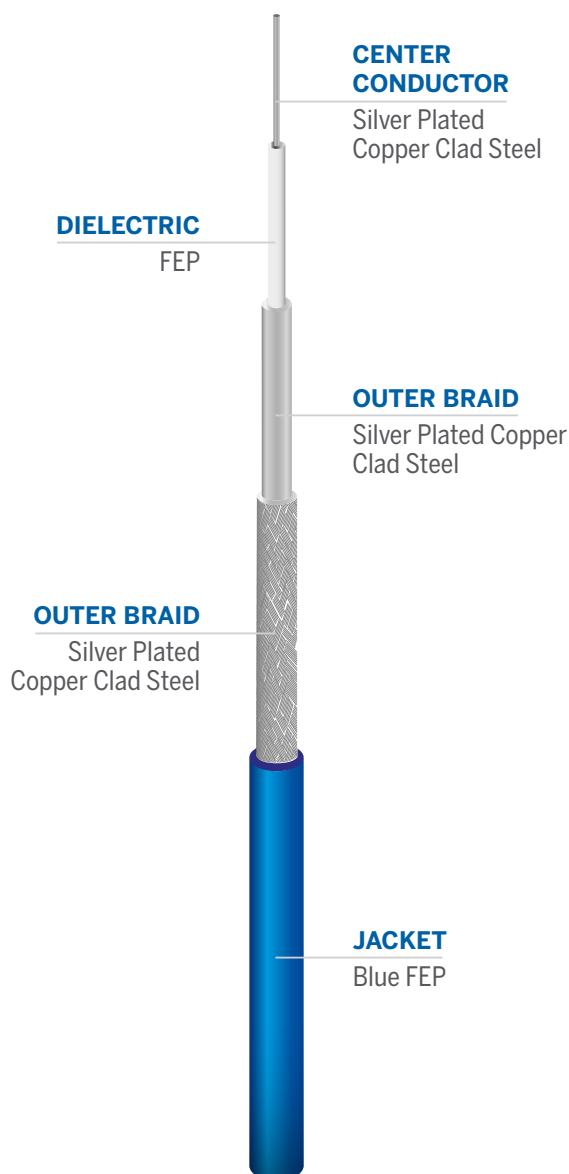

TF-047

Micro-Coaxial Cable



Ordering Guide

TF047

Cable Code

-XXX

Connector A

XXX -

Connector B

XX.X

Length / 3 dig

XX

Units of measure: I = Inches, CM = Centimeters

Code	Part-Number	Stock Code	Description
MSMPF	EZ-PT047-MSMPF-RA-DS	3190-6817	Mini SMP, female, right angle
185M	EZ-PT047-185M-SS	3190-6875	1.85 mm, male, straigh
24M	EZ-PT047-24M-SS	3190-6876	2.4 mm, male, straight
KM	EZ-PT047-KM-SS	3190-6877	2.9 mm, male, straight
SM	EZ-PT047-SM-SS	3190-6878	SMA, male, straight
SMPF	EZ-PT047-SMPF-DS	3190-6879	SMP, female, straight
MSMPF	EZ-PT047-MSMPF-DS	3190-6880	SMPM, female, straight
SMPSF-RA	EZ-PT047-SMPSF-RA-DS	3190-6906	SMPS, female, right angle



Global manufacturing capability:
US, Asia, and India.



Assembled and tested assemblies
provide assured performance.

Rev. 4: 07/2026

Times Microwave Systems
358 Hall Avenue, Wallingford, CT 06492, USA
800.867.2629
www.timesmicrowave.com

PhaseTrack® is a registered trademark of Times Microwave System. All rights reserved.