

# SPACE FLIGHT

## Cable Assemblies



**SpaceFlight™**

**PhaseTrack®**



## Index

PAGE:

<b>4</b>	SpaceFlight™ 095
<b>5</b>	SpaceFlight™ 140
<b>6</b>	SpaceFlight™ 200
<b>7</b>	SpaceFlight™ 310

<b>8</b>	PhaseTrack® 092-SP
<b>9</b>	PhaseTrack® 140-SP
<b>10</b>	PhaseTrack® 210-SP
<b>11</b>	PhaseTrack® 318-SP

Our cable assemblies are low outgassing in accordance with NASA and ECSS standards and are designed for leading edge performance in challenging space applications. PhaseTrack® cable assemblies are designed for applications demanding minimal phase


change over temperature. All PhaseTrack cables use a proprietary TF4® dielectric that does not have the abrupt shift in the phase that occurs with solid- or tape-wrapped PTFE-based products under normal room ambient temperature conditions.

## Space Assembly Comparison Chart

Space Assembly Type	Cable	Max. Frequency
SpaceFlight™ Space Assemblies	SPFLT-095	40
	SPFLT-140	40
	SPFLT-200	30
	SPFLT-310	18.5
PhaseTrack® -SP Space Assemblies	PT092-SP	40
	PT140-SP	40
	PT210-SP	28
	PT318-SP	18

## Cable Assembly Guide

Selecting the correct assembly for the right application is not always an easy task. Below are some considerations when selecting RF test assemblies.

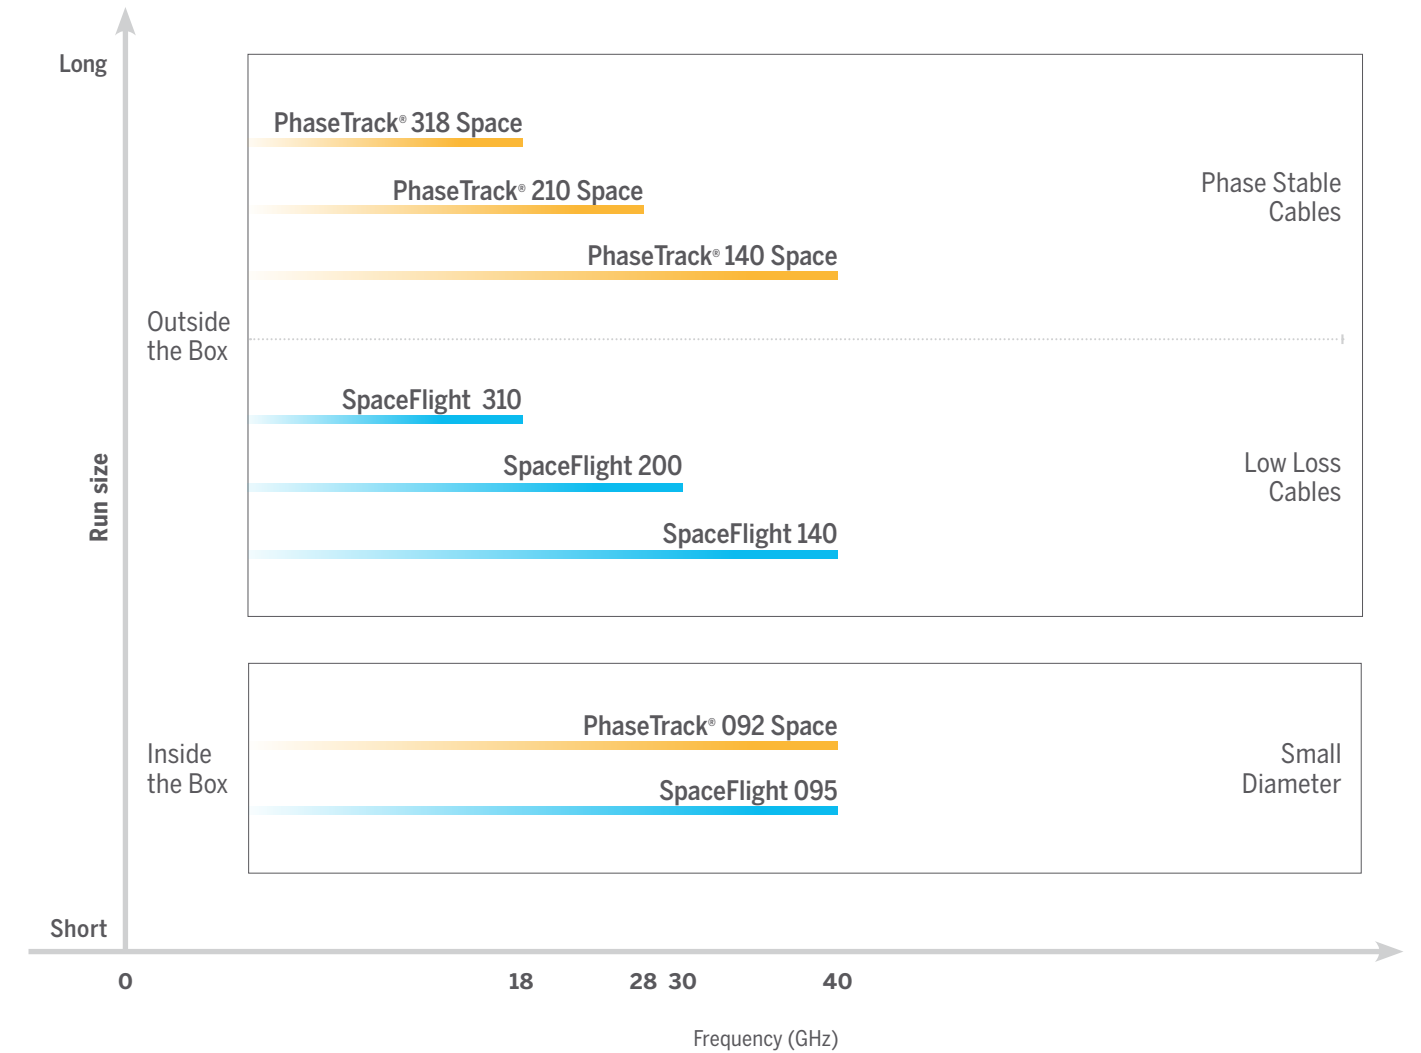

- Sold as cable assemblies
- Class 100,000 clean room manufacturing
- Vented connectors, if applicable
- Optimized for lowest attenuation
- Radiation Resistance: 100 MRads

# SpaceFlight™ 095

Cable Assemblies • Space Flight Applications

## Features

- Low Loss
- Radiation Resistant
- Low Outgassing
- Light Weight

## Specifications

 Impedance 50 Ohms	 Op Temp -238 to +302°F -150 to +150°C
Units	

Diameter	in (mm)	0.102 (2.5908)
Weight	lb/ft (kg/m)	0.081 (0.1205)
Minimum Bend Radius	in (mm)	0.5 (12.7)
Maximum Frequency	GHz	40
Maximum Operating Voltage	VACrms	1300
Capacitance	pF/ft (pF/m)	25.8 (83.62)
Velocity of Propagation	%	81
Delay	ns/ft (ns/m)	1.25 (4.1)
Shielding	dB	> 90

## Calculation

$$IL = (K1 \times v(f) + K2 \times f) \times \text{Cable Length} + \text{Connector 1 Loss} + \text{Connector 2 Loss}$$

Cable Insertion Loss  
f = Frequency (MHz)      Use K values with  
matching length unit

K values	dB/ft	dB/m
K1	0.006525	0.021407
K2	0.0000015	0.0000050

## Ordering Guide SPFLT095

-XXXXX XXXXX- XX.X X  
- Connector A Connector B Length I- Inches, F-Feet, M-Meter, C-Centimeters

Connector Code	Description	Connector Body	Center Contact	Loss
SP116	2.92mm, Male, Straight	Stainless Steel, ASTM A582; Gold Plate, MIL-DTL-45204	Beryllium Copper, ASTM B196; Gold Plate, MIL-DTL-45204	0.04 x vf (GHz)
SP054	2.92mm, Male, Right Angle	Stainless Steel, ASTM A582; Passivate, AMS-2700	Beryllium Copper, ASTM B196; Gold Plate, MIL-DTL-45204	0.05 x vf (GHz)
47211	SMA, Male, Straight	Stainless Steel, ASTM A582; Gold Plate, MIL-DTL-45204	Beryllium Copper, ASTM B196; Gold Plate, MIL-DTL-45204	0.04 x vf (GHz)
47212	SMA, Male, Right Angle	Stainless Steel, ASTM A582; Passivate, AMS-2700	Beryllium Copper, ASTM B196; Gold Plate, MIL-DTL-45204	0.05 x vf (GHz)
SP164	SMP, Female, Right Angle	Beryllium Copper, ASTM B196; Gold Plate, MIL-DTL-45204	Beryllium Copper, ASTM B196; Gold Plate, MIL-DTL-45204	0.07 x vf (GHz)
SP099	SMA, Male, Straight	Stainless Steel, ASTM A582; Passivate, AMS-2700	Beryllium Copper, ASTM B196; Gold Plate, MIL-DTL-45204	0.04 x vf (GHz)
3190-3379	SMPM, Female, Right Angle	Beryllium Copper, ASTM B196; Gold Plate, ASTM B488, Over Nickel, AMS-QQ-N-290	Beryllium Copper, ASTM B196; Gold Plate, ASTM B488, Over Nickel, AMS-QQ-N-290	0.07 x vf (GHz)
3190-3378	SMPM, Female, Straight	Beryllium Copper, ASTM B196; Gold Plate, ASTM B488, Over Nickel, AMS-QQ-N-290	Beryllium Copper, ASTM B196; Gold Plate, ASTM B488, Over Nickel, AMS-QQ-N-290	0.06 x vf (GHz)

# SpaceFlight™ 140

Cable Assemblies • Space Flight Applications



## Features

- Low Loss
- Radiation Resistant
- Low Outgassing
- Light Weight

## Specifications

 Impedance 50 Ohms	 Op Temp -238 to +302°F -150 to +150°C
Units	

Diameter	in (mm)	0.139 (3.5306)
Weight	lb/ft (kg/m)	0.0148 (0.022)
Minimum Bend Radius	in (mm)	0.625 (15.875)
Maximum Frequency	GHz	40
Maximum Operating Voltage	VACrms	3000
Capacitance	pF/ft (pF/m)	25.4 (84.66)
Velocity of Propagation	%	80
Delay	ns/ft (ns/m)	1.29 (4.23)
Shielding	dB	> 90

## Calculation

$$IL = (K1 \times v(f) + K2 \times f) \times \text{Cable Length} + \text{Connector 1 Loss} + \text{Connector 2 Loss}$$

Cable Insertion Loss  
f = Frequency (MHz)      Use K values with  
matching length unit

K values	dB/ft	dB/m
K1	0.003640	0.011942
K2	0.0000014	0.0000047

## Ordering Guide SPFLT140

-XXXXX XXXXX- XX.X X  
- Connector A Connector B Length I- Inches, F-Feet, M-Meter, C-Centimeters

Connector Code	Description	Connector Body	Center Contact	Loss
SP048	SMA, Male, Straight	Stainless Steel, ASTM A582; Gold Plate, MIL-DTL-45204	Beryllium Copper, ASTM B196; Gold Plate, MIL-DTL-45204	0.04 x vf (GHz)
SP047	SMA, Male, Right Angle	Stainless Steel, ASTM A582; Gold Plate, MIL-DTL-45204	Beryllium Copper, ASTM B196; Gold Plate, MIL-DTL-45204	0.05 x vf (GHz)
SP042	SMP, Female, Straight, Bulkhead	Stainless Steel, ASTM A582; Passivate, AMS-2700	Beryllium Copper, ASTM B196; Gold Plate, MIL-DTL-45204	0.05 x vf (GHz)
SP074	2.92mm, Male, Straight	Stainless Steel, ASTM A582; Passivate, AMS-2700	Beryllium Copper, ASTM B196; Gold Plate, MIL-DTL-45204	0.04 x vf (GHz)

## Features

- Low Loss
- High Power Handling
- Multipaction Resistant
- Vented Connectors
- Radiation Resistant
- Low Outgassing

## Specifications

Impedance 50 Ohms  
Op Temp -238 to +302°F  
-150 to +150°C



	Units	
Diameter	in (mm)	0.194 (4.9276)
Weight	lb/ft (kg/m)	0.035 (0.0521)
Minimum Bend Radius	in (mm)	1.0 (25.4)
Maximum Frequency	GHz	30
Maximum Operating Voltage	VACrms	3000
Capacitance	pF/ft (pF/m)	25.81 (84.66)
Velocity of Propagation	%	80
Delay	ns/ft (ns/m)	1.27 (4.16)
Shielding	dB	> 90

## Calculation

$$IL = (K1 \times v(f) + K2 \times f) \times \text{Cable Length} + \text{Connector 1 Loss} + \text{Connector 2 Loss}$$

Cable Insertion Loss  
f = Frequency (MHz)  
Use K values with matching length unit

K values	dB/ft	dB/m
K1	0.002201	0.007221
K2	0.0000014	0.0000046

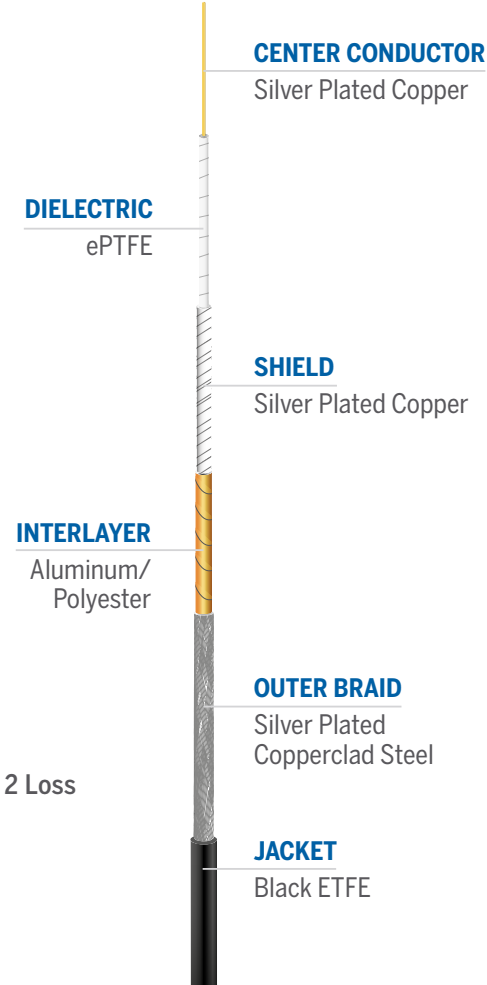

## Ordering Guide SPFLT200

-XXXXX XXXXX- XX.X X  
- Connector A Connector B - Length I- Inches, F-Feet, M-Meter, C-Centimeters

Connector Code	Description	Connector Body	Center Contact	Loss
SP068	2.92mm, Male, Right Angle	Stainless Steel, ASTM A582; Passivate, AMS-2700	Beryllium Copper, ASTM B196; Gold Plate, MIL-DTL-45204	0.05 x vf (GHz)
SP018	SMA, Male, Straight	Stainless Steel, ASTM A582; Passivate, AMS-2700	Beryllium Copper, ASTM B196; Gold Plate, MIL-DTL-45204	0.04 x vf (GHz)
SP028	SMA, Male, Right Angle	Stainless Steel, ASTM A582; Passivate, AMS-2700	Beryllium Copper, ASTM B196; Gold Plate, MIL-DTL-45204	0.05 x vf (GHz)
SP023	3.5mm, Male, Straight	Stainless Steel, ASTM A582; Passivate, AMS-2700	Beryllium Copper, ASTM B196; Gold Plate, MIL-DTL-45204	0.04 x vf (GHz)
SP021	2.92mm, Male, Straight	Stainless Steel, ASTM A582; Passivate, AMS-2700	Beryllium Copper, ASTM B196; Gold Plate, MIL-DTL-45204	0.04 x vf (GHz)

## Features

- Low Loss
- High Power Handling
- Multipaction Resistant
- Vented Connectors
- Radiation Resistant
- Low Outgassing

## Specifications

Impedance 50 Ohms  
Op Temp -238 to +302°F  
-150 to +150°C


	Units	
Diameter	in (mm)	0.313 (7.9502)
Weight	lb/ft (kg/m)	0.7176 (1.0679)
Minimum Bend Radius	in (mm)	1.5 (38.1)
Maximum Frequency	GHz	18.5
Maximum Operating Voltage	VACrms	1300
Capacitance	pF/ft (pF/m)	25.49 (83.62)
Velocity of Propagation	%	81
Delay	ns/ft (ns/m)	1.25 (4.11)
Shielding	dB	> 90

## Calculation

$$IL = (K1 \times v(f) + K2 \times f) \times \text{Cable Length} + \text{Connector 1 Loss} + \text{Connector 2 Loss}$$

Cable Insertion Loss  
f = Frequency (MHz)  
Use K values with matching length unit

K values	dB/ft	dB/m
K1	0.001404	0.004606
K2	0.0000012	0.0000039

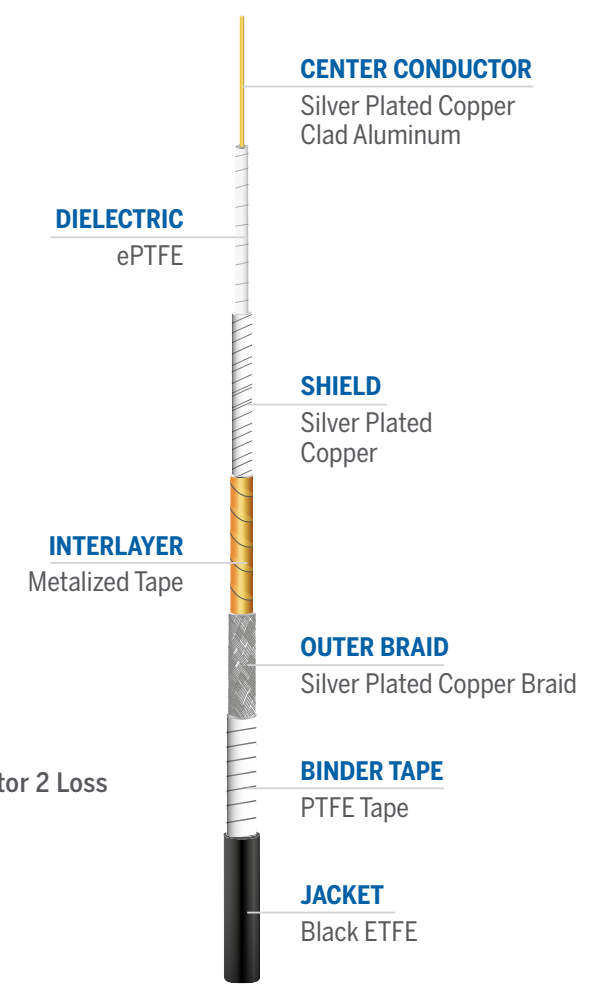

## Ordering Guide SPFLT310

-XXXXX XXXXX- XX.X X  
- Connector A Connector B - Length I- Inches, F-Feet, M-Meter, C-Centimeters

Connector Code	Description	Connector Body	Center Contact	Loss
SP052	SMA, Male, Straight	Stainless Steel, ASTM A582; Passivate, AMS-2700	Beryllium Copper, ASTM B196; Gold Plate, MIL-DTL-45204	0.04 x vf (GHz)
SP077	TNC, Male, Straight, High Power	Beryllium Copper, ASTM B196; Gold Plate, MIL-DTL-45204	Beryllium Copper, ASTM B196; Gold Plate, MIL-DTL-45204	0.07 x vf (GHz)
SP076	TNC, Female, Straight, High Power	Beryllium Copper, ASTM B196; Gold Plate, MIL-DTL-45204	Beryllium Copper, ASTM B196; Gold Plate, MIL-DTL-45204	0.07 x vf (GHz)
SP055	SMA, Male, Right Angle	Beryllium Copper, ASTM B196; Gold Plate, MIL-DTL-45204	Beryllium Copper, ASTM B196; Gold Plate, MIL-DTL-45204	0.05 x vf (GHz)

# PhaseTrack® 092-SP

Cable Assemblies • Space Flight Applications

## Features

- Superior Phase Stability
- PTFE “Knee” is Nonexistent
- TF4™ Dielectric Technology
- Radiation Resistant
- Low Outgassing



**DIELECTRIC**  
TF4®

### CENTER CONDUCTOR

Silver-Plated Copper  
Clad Steel

### SHIELD

Silver Plated Copper

**INTERLAYER**  
Metalized  
Polyimide Tape

### OUTER BRAID

Silver-Plated  
Metal Clad Fiber

### JACKET

Black ETFE

## Specifications

**Impedance**  
50 Ohms

**Op Temp**  
-238 to +302°F  
-150 to +150°C

Units

Diameter	in (mm)	0.103 (2.62)
Weight	lb/ft (kg/m)	0.0113 (0.00513)
Minimum Bend Radius	in (mm)	0.500 (12.70)
Maximum Frequency	GHz	40
Maximum Operating Voltage	VACrms	500
Capacitance	pF/ft (pF/m)	24.2 (79.4)
Velocity of Propagation	%	80
Delay	ns/ft (ns/m)	1.24 (4.07)
Shielding	dB	> 90

## Calculation

$$IL = (K1 \times v(f) + K2 \times f) \times \text{Cable Length} + \text{Connector 1 Loss} + \text{Connector 2 Loss}$$

Cable Insertion Loss  
f = Frequency (MHz)

Use K values with  
matching length unit

K values	dB/ft	dB/m
K1	0.006575	0.021571
K2	0.0000096	0.0000315

## Ordering Guide

PT092

-XXXXX

XXXXX-

XX.X

X

- Connector A

Connector B -

Length

I- Inches, F-Feet, M-Meter, C-Centimeters

Connector Code	Description	Connector Body	Center Contact	Loss
SP116	2.92mm, Male, Straight	Stainless Steel, ASTM A582; Gold Plate, MIL-DTL-45204	Beryllium Copper, ASTM B196; Gold Plate, MIL-DTL-45204	0.04 x vf (GHz)
SP054	2.92mm, Male, Right Angle	Stainless Steel, ASTM A582; Passivate, AMS-2700	Beryllium Copper, ASTM B196; Gold Plate, MIL-DTL-45204	0.05 x vf (GHz)
47211	SMA, Male, Straight	Stainless Steel, ASTM A582; Gold Plate, MIL-DTL-45204	Beryllium Copper, ASTM B196; Gold Plate, MIL-DTL-45204	0.04 x vf (GHz)
47212	SMA, Male, Right Angle	Stainless Steel, ASTM A582; Passivate, AMS-2700	Beryllium Copper, ASTM B196; Gold Plate, MIL-DTL-45204	0.05 x vf (GHz)
SP164	SMP, Female, Right Angle	Beryllium Copper, ASTM B196; Gold Plate, MIL-DTL-45204	Beryllium Copper, ASTM B196; Gold Plate, MIL-DTL-45204	0.07 x vf (GHz)
SP099	SMA, Male, Straight	Stainless Steel, ASTM A582; Passivate, AMS-2700	Beryllium Copper, ASTM B196; Gold Plate, MIL-DTL-45204	0.04 x vf (GHz)

# PhaseTrack® 140-SP

Cable Assemblies • Space Flight Applications



## Features

- Superior Phase Stability
- PTFE “Knee” is Nonexistent
- TF4™ Dielectric Technology
- Radiation Resistant
- Low Outgassing



**DIELECTRIC**  
TF4®

### CENTER CONDUCTOR

Silver Plated Copper

### SHIELD

Silver Plated Copper

**INTERLAYER**  
Metalized  
Polyimide Tape

### OUTER BRAID

Silver Plated  
Metal Clad Fiber

### JACKET

Black ETFE

## Specifications

**Impedance**  
50 Ohms

**Op Temp**  
-238 to +302°F  
-150 to +150°C

Units

Diameter	in (mm)	0.144 (3.6576)
Weight	lb/ft (kg/m)	0.01975 (0.0895)
Minimum Bend Radius	in (mm)	0.75 (19.05)
Maximum Frequency	GHz	40
Maximum Operating Voltage	VACrms	500
Capacitance	pF/ft (pF/m)	25.23 (82.78)
Velocity of Propagation	%	81
Delay	ns/ft (ns/m)	1.26 (4.13)
Shielding	dB	> 90

## Calculation

$$IL = (K1 \times v(f) + K2 \times f) \times \text{Cable Length} + \text{Connector 1 Loss} + \text{Connector 2 Loss}$$

Cable Insertion Loss  
f = Frequency (MHz)

Use K values with  
matching length unit

K values	dB/ft	dB/m
K1	0.004233	0.013886
K2	0.0000054	0.0000176

## Ordering Guide

PT140

-XXXXX

XXXXX-

XX.X

X

- Connector A

Connector B -

Length

I- Inches, F-Feet, M-Meter, C-Centimeters

Connector Code	Description	Connector Body	Center Contact	Loss
SP002	SMA, Male, Straight	Stainless Steel, ASTM A582; Passivate, AMS-2700	Beryllium Copper, ASTM B196; Gold Plate, MIL-DTL-45204	0.04 x vf (GHz)
SP043	SMA, Male, Right Angle	Stainless Steel, ASTM A582; Passivate, AMS-2700	Beryllium Copper, ASTM B196; Gold Plate, MIL-DTL-45204	0.05 x vf (GHz)
SP046	SMA, Female, Straight, Bulkhead	Stainless Steel, ASTM A582; Passivate, AMS-2700	Beryllium Copper, ASTM B196; Gold Plate, MIL-DTL-45204	0.05 x vf (GHz)
3190-3212	Mini SMP, Female, Straight	Beryllium Copper, ASTM B196; Gold Plate, ASTM B488, Over Nickel, AMS-QQ-N-290	Beryllium Copper, ASTM B196; Gold Plate, ASTM B488, Over Nickel, AMS-QQ-N-290	0.07 x vf (GHz)
SP062	SMP, Female, Straight	Beryllium Copper, ASTM B196; Gold Plate, MIL-DTL-45204	Beryllium Copper, ASTM B196; Gold Plate, MIL-DTL-45204	0.06 x vf (GHz)
SP081	2.92mm, Male, Straight	Stainless Steel, ASTM A582; Passivate, AMS-2700	Beryllium Copper, ASTM B196; Gold Plate, MIL-DTL-45204	0.04 x vf (GHz)
SP042	SMA, Female, Straight, Bulkhead	Stainless Steel, ASTM A582; Passivate, AMS-2700	Beryllium Copper, ASTM B196; Gold Plate, MIL-DTL-45204	0.05 x vf (GHz)

# PhaseTrack® 210-SP

Cable Assemblies • Space Flight Applications

## Features

- Superior Phase Stability
- PTFE “Knee” is Nonexistent
- TF4™ Dielectric Technology
- High Power Handling
- Multipaction Resistant
- Vented Connectors
- Radiation Resistant
- Low outgassing

## Specifications

 Impedance 50 Ohms	 Op Temp -238 to +302°F -150 to +150°C
Units	


Diameter	in (mm)	0.224 (5.69)
Weight	lb/ft (kg/m)	0.048 (0.02177)
Minimum Bend Radius	in (mm)	1.125 (28.575)
Maximum Frequency	GHz	28
Maximum Operating Voltage	VACrms	1900
Capacitance	pF/ft (pF/m)	24.4 (80.06)
Velocity of Propagation	%	83
Delay	ns/ft (ns/m)	1.23 (4.04)
Shielding	dB	> 90

## Calculation

$$IL = (K1 \times v(f) + K2 \times f) \times \text{Cable Length} + \text{Connector 1 Loss} + \text{Connector 2 Loss}$$

Cable Insertion Loss  
f = Frequency (MHz)  
Use K values with  
matching length unit

K values	dB/ft	dB/m
K1	0.002597	0.008520
K2	0.0000944	0.0003095

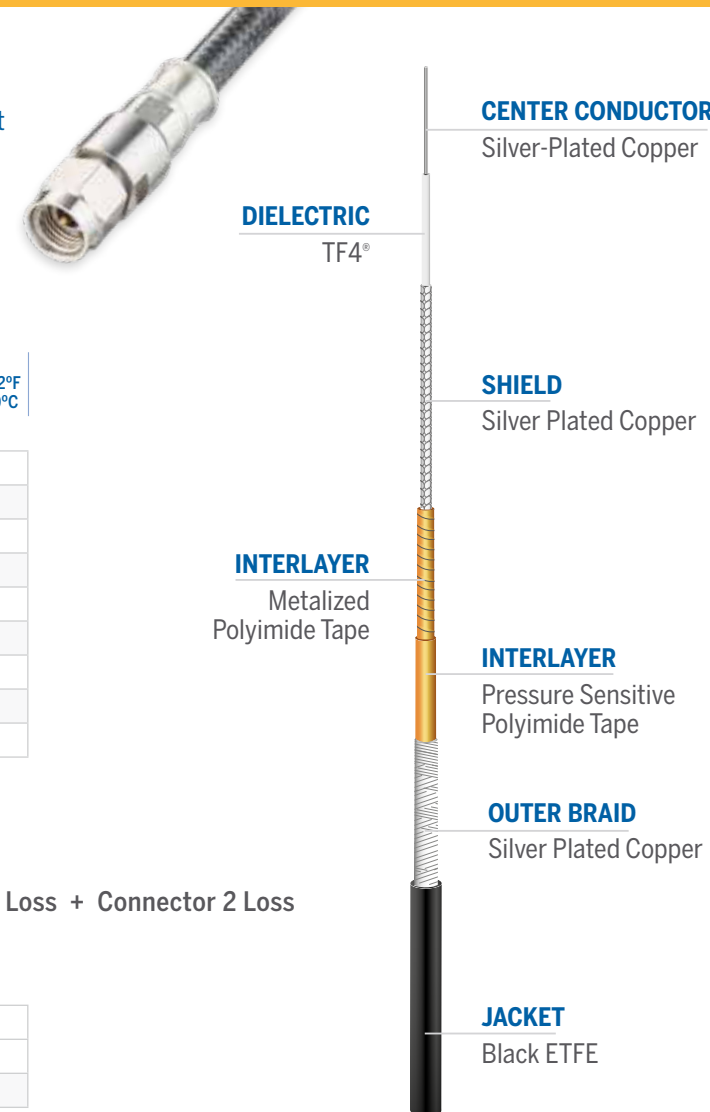

## Ordering Guide

PT210SP -XXXXX XXXXX- XX.X X  
 - Connector A Connector B - Length I- Inches, F-Feet, M-Meter, C-Centimeters

Connector Code	Description	Connector Body	Center Contact	Loss
SP039	SMA, Male, straight	Stainless Steel, ASTM A582; Passivate, AMS-2700	Beryllium Copper, ASTM B196; Gold Plate, MIL-DTL-45204	0.04 x vf (GHz)
SP024	SMA, Male, Right Angle	Stainless Steel, ASTM A582; Passivate, AMS-2700	Beryllium Copper, ASTM B196; Gold Plate, MIL-DTL-45204	0.05 x vf (GHz)
SP080	2.92mm, Male, Straight	Stainless Steel, ASTM A582; Passivate, AMS-2700	Beryllium Copper, ASTM B196; Gold Plate, MIL-DTL-45204	0.04 x vf (GHz)
SP030	TNC, Male, Staight, High Power	Stainless Steel, ASTM A582; Passivate, AMS-2700	Beryllium Copper, ASTM B196; Gold Plate, MIL-DTL-45204	0.07 x vf (GHz)
SP001	Precision TNC, Male, Staight	Stainless Steel, ASTM A582; Passivate, AMS-2700	Beryllium Copper, ASTM B196; Gold Plate, MIL-DTL-45204	0.06 x vf (GHz)

# PhaseTrack® 318-SP

Cable Assemblies • Space Flight Applications

## Features

- Superior Phase Stability
- PTFE “Knee” is Nonexistent
- TF4™ Dielectric Technology
- High Power Handling
- Multipaction Resistant
- Vented Connectors
- Radiation Resistant
- Low outgassing

## Specifications

 Impedance 50 Ohms	 Op Temp -238 to +302°F -150 to +150°C
Units	


Diameter	in (mm)	0.32 (8.128)
Weight	lb/ft (kg/m)	0.0874 (0.1301)
Minimum Bend Radius	in (mm)	1.75 (44.45)
Maximum Frequency	GHz	18
Maximum Operating Voltage	VACrms	500
Capacitance	pF/ft (pF/m)	24.0 (78.74)
Velocity of Propagation	%	82.5
Delay	ns/ft (ns/m)	1.23 (4.04)
Shielding	dB	> 90

## Calculation

$$IL = (K1 \times v(f) + K2 \times f) \times \text{Cable Length} + \text{Connector 1 Loss} + \text{Connector 2 Loss}$$

Cable Insertion Loss  
f = Frequency (MHz)  
Use K values with  
matching length unit

K values	dB/ft	dB/m
K1	0.001415	0.004642
K2	0.0000070	0.0000229

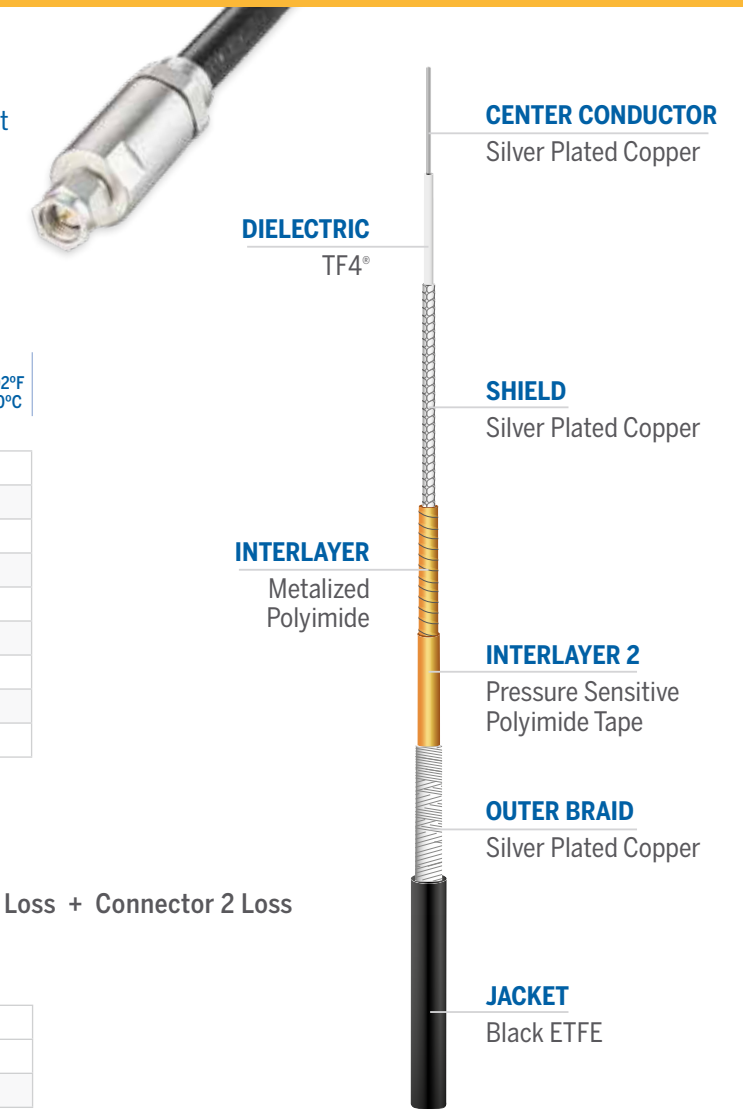

## Ordering Guide

PT318SP -XXXXX XXXXX- XX.X X  
 - Connector A Connector B - Length I- Inches, F-Feet, M-Meter, C-Centimeters

Connector Code	Description	Connector Body	Center Contact	Loss
SP070	SMA, Male, Straight	Stainless Steel, ASTM A582; Passivate, AMS-2700	Beryllium Copper, ASTM B196; Gold Plate, MIL-DTL-45204	0.04 x vf (GHz)
SP051	TNC, Male, Staight, High Power	Beryllium Copper, ASTM B196; Gold Plate, MIL-DTL-45204	Beryllium Copper, ASTM B196; Gold Plate, MIL-DTL-45204	0.07 x vf (GHz)
SP104	2.92mm, Male, Straight	Stainless Steel, ASTM A582; Passivate, AMS-2700	Beryllium Copper, ASTM B196; Gold Plate, MIL-DTL-45204	0.04 x vf (GHz)

Rev.4: 11/2024



**Times Microwave Systems**

358 Hall Avenue

Wallingford, CT 06492, USA

T 800. 867.2629



PhaseTrack® is a registered trademark of Times Microwave Systems.  
All rights reserved.