

XtendedFlex® 213



XtendedFlex® 213 offers high power and voltage handling while maintaining a high level of flexibility. It is ideal for dynamic industrial and transportation applications that demands long service life.

The XtendedFlex family of cables have been designed and tested to support high flex and continuous flex applications.

Features

- High Flexibility
- High Power Handling
- Ruggedized for Industrial Vehicles
- Exceptional Flex Life
- Highly Shielded

Specifications

Ω Impedance
50 Ohms

Op Temp
-67 to +221°F
-55 to +105°C

Units

	in (mm)	
Diameter	0.405 (10.29)	
Weight	200.9	g/m
Minimum Bend Radius	2.00 (50.8)	in (mm)
Maximum Frequency	5.8	GHz
Velocity of Propagation	76	%
Capacitance	26.9 (88.3)	pF/ft (pF/m)
Time Delay	1.34 (4.39)	ns/ft (ns/m)
Shielding Effectiveness	-80	dB

Calculation

$$IL = (K1 \times v(f) + K2 \times f) \times \text{Cable Length}$$

Cable Insertion Loss
f = Frequency (MHz)


Use K values with
matching length unit

K Values

dB/100ft

dB/100m

K1	0.19366	0.63540
K2	0.00013	0.00043

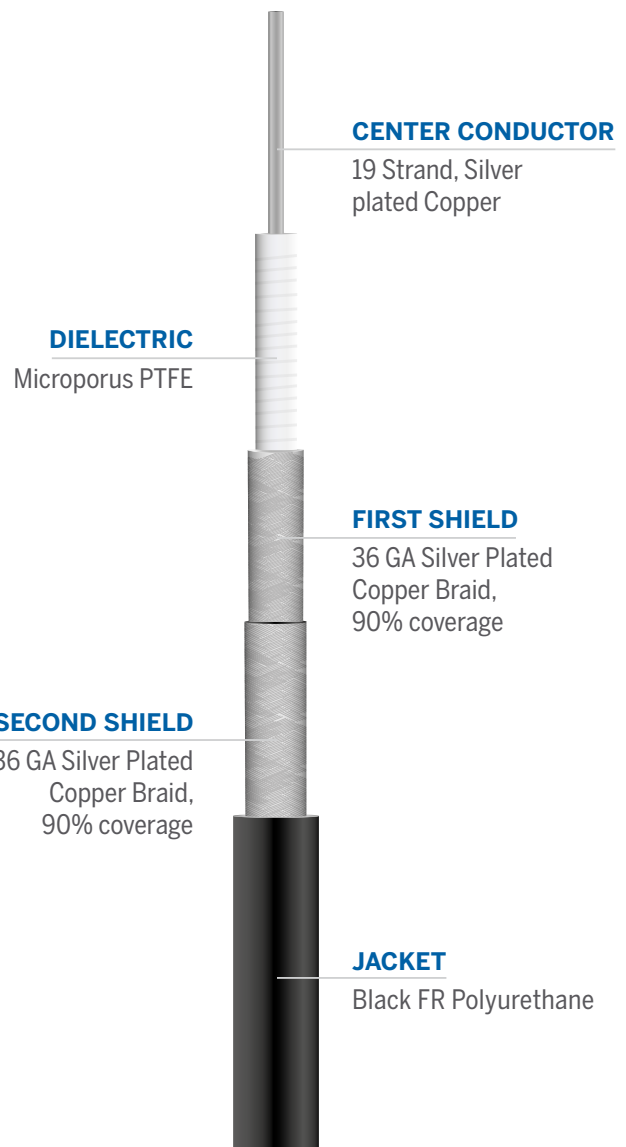

XtendedFlex[®] 213



Cable Assembly Ordering Guide

XF213

Cable Code

- Code

Connector A

Code -

Connector B

XX.X

Length

XX

Units of measure: I = Inches, CM = Centimeters

Connector Options

Interface	Gender	Orientation	Part Number	Stock Code	Connector Code
N	Male	Straight	TC-400-NMH-X	3190-2626	NM
		Right Angle	TC-400-NMH-RA-D	3190-2293	NMR
BNC	Male	Straight	TC-400-BM-X	3190-6232	BM
		Right Angle	TC-400-BM-RA-D	3190-6430	BMR



Global manufacturing capability:
US, Asia, and India.



Assembled and tested assemblies
provide assured performance.

Rev. 2: 4/2026

Times Microwave Systems
358 Hall Avenue, Wallingford, CT 06492, USA
800.867.2629
www.timesmicrowave.com

XtendedFlex[®] is a registered trademark of Times Microwave Systems. All rights reserved.