

XtendedFlex® 304



XtendedFlex® 304 is a versatile coaxial cable offering increased power handling and low attenuation with high flexibility. Similar in construction to XF-213, the smaller XF-304 is an ideal solution for highly dynamic applications that may have more stringent weight and size requirements.

The XtendedFlex family of cables have been designed and tested to support high flex and continuous flex applications.

Features

- High Flexibility
- High Power Handling
- Low Attenuation
- Exceptional Flex Life
- Highly Shielded

Specifications

Ω Impedance
50 Ohms

Op Temp
-67 to +221°F
-55 to +105°C

Units

Diameter	in (mm)	0.305 (7.75)
Weight	g/m	116.1
Minimum Bend Radius	in (mm)	1.50 (38.1)
Maximum Frequency	GHz	5.8
Velocity of Propagation	%	76
Capacitance	pF/ft (pF/m)	26.9 (88.3)
Time Delay	ns/ft (ns/m)	1.34 (4.39)
Shielding Effectiveness	dB	-80

Calculation

$$IL = (K1 \times \sqrt{f}) + K2 \times f \times \text{Cable Length}$$

Cable Insertion Loss
f = Frequency (MHz)


Use K values with
matching length unit

K Values

dB/100ft

dB/100m

K1	0.29006	0.95169
K2	0.00012	0.00039

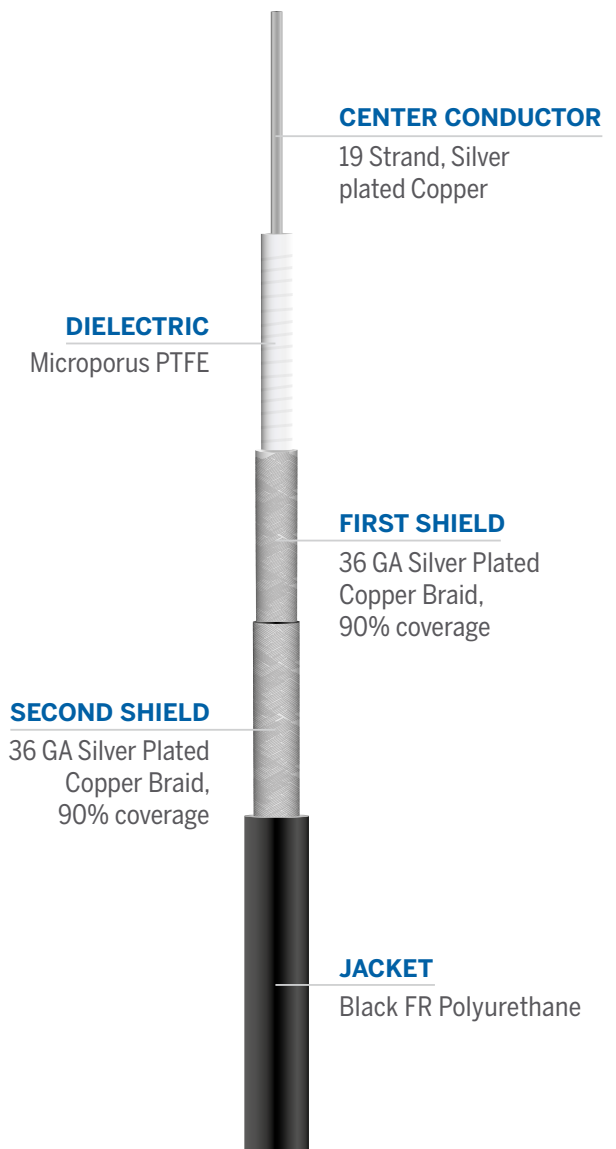

XtendedFlex[®] 304



Cable Assembly Ordering Guide

XF304

Cable Code

- Code

Connector A

Code -

Connector B

XX.X

Length

XX

Units of measure: I = Inches, CM = Centimeters

Connector Options

Interface	Gender	Orientation	Part Number	Stock Code	Connector Code
N	Male	Straight	TC-300-NMH-X	3190-2861	NM
		Right Angle	TC-300-NMH-RA-D	3190-2761	NMR



Global manufacturing capability:
US, Asia, and India.



Assembled and tested assemblies
provide assured performance.

Rev. 2: 4/2026

Times Microwave Systems
358 Hall Avenue, Wallingford, CT 06492, USA
800.867.2629
www.timesmicrowave.com

XtendedFlex[®] is a registered trademark of Times Microwave Systems. All rights reserved.